

Modern decorative luminaire, intended for mounting inside offices, apartments and lofts, for LED light sources.

TECHNICAL DATA

Mounting: suspended, on wire suspension (on request), directly on the ceiling, with mounting brackets (included), on the wall vertically (connector downwards) with mounting brackets (included), on the wall horizontally with mounting brackets (on request)

Body: polycarbonate

Colour: transparent

Diffuser: polycarbonate

ELECTRICAL DATA

Power supply efficiency: >90%

Power: 220-240V 50/60Hz

Includes light source: yes

Type of equipment: ED

Electrical connection: max 3x0,75 mm² wire

OPTICAL DATA

Light distribution: omnidirectional

Way of lighting: direct

Type of optic: diffuser

Louwer: louver

ULOR / DLOR: 10/90

GENERAL DATA


Lifetime (L90B10): 50 000 h

Available on request: DALI

Warranty: 5 years

Application: offices, flats, lofts

Other remarks: in order to apply the luminaire in an aggressive environment a consultation with the LUG Technical Preparation of Production Branch is required

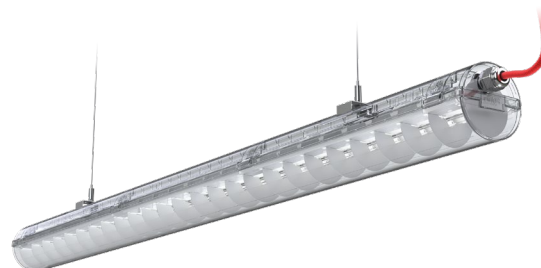


5 year warranty

Code	Degree of water and dust protection	Luminaire power [W]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/Ra
Type: white wire						
090390.5L01.201	IP20	24	3750	156	3000	≥80
090390.5L02.201	IP20	24	3750	156	4000	≥80
090390.5L07.201	IP20	24	3150	131	2700	≥80
090390.5L03.201	IP20	32	4950	155	3000	≥80
090390.5L04.201	IP20	32	4950	155	4000	≥80
090390.5L08.201	IP20	32	4150	130	2700	≥80

Type: red wire

090390.5L01.204	IP20	24	3750	156	3000	≥80
090390.5L02.204	IP20	24	3750	156	4000	≥80
090390.5L07.204	IP20	24	3150	131	2700	≥80
090390.5L03.204	IP20	32	4950	155	3000	≥80
090390.5L04.204	IP20	32	4950	155	4000	≥80
090390.5L08.204	IP20	32	4150	130	2700	≥80

Code	Dimensions [mm] L W H	Mounting dimensions [mm] D	Pallet quantity	Net weight [kg]
Type: white wire				
090390.5L01.201	1245 100 90	766	120	2.0
090390.5L02.201	1245 100 90	766	120	2.0
090390.5L07.201	1245 100 90	766	120	2.0
090390.5L03.201	1245 100 90	766	120	2.0

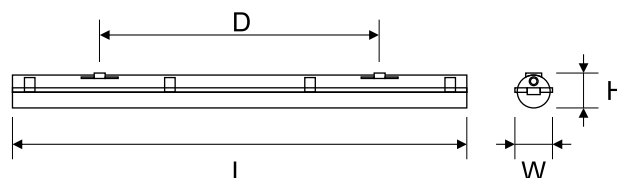

The luminaires are not intended for mounting in places exposed to atmospheric conditions, in car washes, in rooms where washing with pressure washers is used, in livestock rooms, in aggressive environments, etc.
In order to apply the luminaire in an aggressive environment, for example with an increased concentration of sulfur, salt or other aggressive substances, a consultation with the LUG Technical Preparation of Production Branch is required.
Luminous flux tolerance +/- 10%.
Power tolerance +/- 5%.
Up-to-date product info and General Warranty Terms available on our website www.luglightfactory.com
Detailed information on luminous fluxes and powers for individual indexes are indicated on the product data sheet.
The parameters in the data sheet are given for Ta=25°C.
Colour temperature tolerance +/- 5%.

Code	Dimensions [mm] L W H	Mounting dimensions [mm] D	Pallet quantity	Net weight [kg]
Type: white wire				
090390.5L04.201	1245 100 90	766	120	2.0
090390.5L08.201	1245 100 90	766	120	2.0
Type: red wire				
090390.5L01.204	1245 100 90	766	120	2.0
090390.5L02.204	1245 100 90	766	120	2.0
090390.5L07.204	1245 100 90	766	120	2.0
090390.5L03.204	1245 100 90	766	120	2.0
090390.5L04.204	1245 100 90	766	120	2.0
090390.5L08.204	1245 100 90	766	120	2.0

OTHER PICTURES



ACCESSORIES



150060.00062

Suspension hanger MINI



150060.00987

Gripper (1 pcs.)


 150061.00063
 150062.00064

Mechanical round suspension



150020.01187

ATLANTYK 2.0 LED wall mounting bracket for horizontal mounting (2 pcs.)



 150061.00066
 150062.00067

Mechanical round suspension with supply connector

LIGHT BEAM CURVES

090390.5L01.201

The luminaires are not intended for mounting in places exposed to atmospheric conditions, in car washes, in rooms where washing with pressure washers is used, in livestock rooms, in aggressive environments, etc.
 In order to apply the luminaire in an aggressive environment, for example with an increased concentration of sulfur, salt or other aggressive substances, a consultation with the LUG Technical Preparation of Production Branch is required.
 Luminous flux tolerance +/- 10%.
 Power tolerance +/- 5%.
 Up-to-date product info and General Warranty Terms available on our website www.luglightfactory.com
 Detailed information on luminous fluxes and powers for individual indexes are indicated on the product data sheet.
 The parameters in the data sheet are given for Ta=25°C.
 Colour temperature tolerance +/- 5%.



WAY OF LIGHTING

090390.5L01.201



The luminaires are not intended for mounting in places exposed to atmospheric conditions, in car washes, in rooms where washing with pressure washers is used, in livestock rooms, in aggressive environments, etc.
In order to apply the luminaire in an aggressive environment, for example with an increased concentration of sulfur, salt or other aggressive substances, a consultation with the LUG Technical Preparation of Production Branch is required.
Luminous flux tolerance +/- 10%.
Power tolerance +/- 5%.
Up-to-date product info and General Warranty Terms available on our website www.luglightfactory.com
Detailed information on luminous fluxes and powers for individual indexes are indicated on the product data sheet.
The parameters in the data sheet are given for $T_a=25^{\circ}\text{C}$.
Colour temperature tolerance +/- 5%.